

POLYCAB

IDEAS. CONNECTED.

YOUR CONNECTION TO A SAFER FUTURE

House Wires & Cables Pricelist



About Polycab India Ltd

Polycab India Limited (PIL) is India's largest manufacturer of Wires and Cables and one of the fastest growing FMEG companies with a consolidated turnover of ₹ 180+ Bn in FY24. PIL is at the forefront of providing innovative, safe and energy efficient products to a diverse set of customers via a strong distribution network of 3,800+ authorized dealers and 205,000+ retail outlets. PIL's business operations span across India through 28 manufacturing facilities, 13 offices and 29 warehouses. PIL has also served customers in 79 countries globally. PIL's 4,800+ employees are dedicated to upholding robust governance practices, preserving a customer centric culture, having a purpose to serve the communities, and imbibing a genuine sense of ecological consciousness. For further information, please visit www.polycab.com.



India's Widest Range of Wires & Cables

We manufacture and sell a diverse range of wires and cables and our key products in this segment are power cables, control cables, instrumentation cables, solar cables, building wires, flexible cables, flexible single/multi core cables, communication cables and others including welding cables, submersible flat and round cables, rubber cables, overhead conductors, railway signalling cables and specialty cables. We strive to deliver customized and innovative products with speed and quality service. Our production process is designed to ensure quality while delivering the ability to produce complex electrical products on short timeframes to meet our customers' needs.



Innovation & Sustainability

Polycab's house wires epitomize innovation and sustainability. We've invested heavily in research and development to create products that cater to our customers' dynamic needs while maintaining a strong commitment to safety and the environment. Polycab house wires are made from **lead free non-carcinogenic raw materials**. They meet stringent European norms of RoHS and

REACH compliance.

Our R&D team is dedicated to pioneering ground-breaking solutions, with a focus on customer safety. We're proud to have engineered insulating compounds that ensure safety during fire emergencies and also possess a **high oxygen index** and low smoke properties to set up a new standard for **safety and environmental responsibility**.

Quality Focus

- Our manufacturing facilities are accredited with quality management system certificates for compliance with **ISO 9001, ISO 14001 and OHSAS 18001** requirements.
- Our products are also certified to be compliant with various national and international quality standards including Bureau of Indian Standards '**BIS**', British Approvals Service for Cables '**BASEC**', **US Underwriters Laboratory**, **FQC** and international electrotechnical commission '**IEC**'.



POLYCABMAXIMA+

Green Wire HR FR-LSH LF

EXTRA SAFE, LOW SMOKE WIRES



POLYCABMAXIMA+ PRICELIST

SIZE (SQ.MM.)	90 METER BOX PACKAGING	
	LP (₹)	COILS PER CARTON
0.75	1425	28
1	1925	24
1.5	2815	16
2.5	4425	12
4	6465	8
6	9700	6
10	17050	1
16	25160	1

POLYCAB PVC INSULATED SINGLE CORE UNSHEATHED INDUSTRIAL (MULTISTRAND) CABLES - HEAT RESISTANT FLAME RETARDANT LOW SMOKE LOW HALOGEN - LEAD FREE CONFORMING TO IS-694:2010 WITH BRIGHT ANNEALED ELECTROLYTIC BARE COPPER CONDUCTOR OF VOLTAGE GRADE 1100 VOLTS

PRODUCT FEATURES:



LOW SMOKE
DURING EXTREME FIRES



LOW TOXIC
FUMES



20% HIGHER
HEAT RESISTANCE



LEAD FREE
PVC INSULATION



RODENT
PROTECTION



MOISTURE
RESISTANT



HIGH ABRASION
RESISTANCE



ENERGY SAVING
CONSTRUCTION



REACH
COMPLIANT

RoHS
COMPLIANT

99.97% HIGH
PURITY COPPER

POLYCAB

AB

POLYCABOPTIMA+

LF FR

HIGH QUALITY MATERIALS, POWER SAVING DESIGN



POLYCABOPTIMA+ PRICELIST

SIZE (SQ.MM.)	90 METER BOX PACKAGING	
	LP (₹)	COILS PER CARTON
0.75	1360	28
1	1830	24
1.5	2675	16
2.5	4235	12
4	6190	8
6	9245	6
10	13825	1
16	21830	1

POLYCAB PVC INSULATED SINGLE CORE UNSHEATHED INDUSTRIAL (MULTISTRAND) CABLES - LEAD FREE FLAME RETARDANT (LF FR) CONFORMING TO IS-694:2010 WITH BRIGHT ANNEALED ELECTROLYTIC BARE COPPER CONDUCTOR OF VOLTAGE GRADE 1100 VOLTS

PRODUCT FEATURES:



**FLAME
RETARDANT**



**LEAD FREE
PVC INSULATION**



**ENERGY SAVING
CONSTRUCTION**



**RODENT
PROTECTION**



**MOISTURE
RESISTANT**



**HIGH ABRASION
RESISTANCE**

**REACH
COMPLIANT**


**RoHS
COMPLIANT**

**99.97% HIGH
PURITY COPPER**

POLYCABPRIMMA

LF FR

FLAME RETARDANT LEAD FREE WIRES



POLYCABPRIMMA PRICELIST

SIZE (SQ.MM.)	90 METER BOX PACKAGING	
	LP (₹)	COILS PER CARTON
0.75	1350	28
1	1725	24
1.5	2505	16
2.5	3990	12
4	6130	8
6	9220	6

POLYCABPRIMMA PVC INSULATED SINGLE CORE UNSHEATHED INDUSTRIAL (MULTISTRAND) CABLES - LEAD FREE FLAME RETARDANT (LF FR) CONFORMING TO IS-694:2010 WITH BRIGHT ANNEALED ELECTROLYTIC BARE COPPER CONDUCTOR OF VOLTAGE GRADE 1100 VOLTS

PRODUCT FEATURES:



**FLAME
RETARDANT**



**LEAD FREE
PVC INSULATION**

99.97%

COPPER



**HIGH ABRASION
RESISTANCE**



**EASY TO PULL
INSIDE CONDUITS**



**RODENT
PROTECTION**



**MOISTURE
RESISTANT**

**REACH
COMPLIANT**

**RoHS
COMPLIANT**

ETIRA**FR****SUPERIOR QUALITY POCKET FRIENDLY PRICE****ETIRA PRICELIST**

SIZE (SQ.MM.)	90 METER BOX PACKAGING	
	LP (₹)	COILS PER CARTON
0.75	1250	28
1	1630	24
1.5	2395	16
2.5	3820	12
4	5725	8
6	8780	6

ETIRA PVC INSULATED SINGLE CORE UNSHEATHED INDUSTRIAL (MULTISTRAND) CABLES - FLAME RETARDANT (FR) CONFORMING TO IS-694:2010 WITH BRIGHT ANNEALED ELECTROLYTIC BARE COPPER CONDUCTOR OF VOLTAGE GRADE 1100 VOLTS

PRODUCT FEATURES:

**FLAME
RETARDANT**

99.97%

COPPER

**REACH
COMPLIANT**

**RoHS
COMPLIANT**



**EASY TO PULL
INSIDE CONDUITS**

etira

etira

180M POUCH PACKAGING




LOW SMOKE
DURING EXTREME FIRES


LOW TOXIC
FUMES


LEAD FREE
PVC INSULATION


HIGH ABRASION
RESISTANCE

 **FLAMESTOP**
TECHNOLOGY

REACH
COMPLIANT

RoHS
COMPLIANT


99.97% HIGH
PURITY COPPER


RODENT
PROTECTION

POLYCAB GREEN WIRE PRICELIST

SIZE (SQ.MM.)	180 METER POUCH PACKAGING	
	LP (₹)	COILS PER CARTON
1	3850	12
1.5	5630	10
2.5	8850	6
4	12930	4
6	19400	3

POLYCAB PVC INSULATED SINGLE CORE UNSHEATHED INDUSTRIAL (MULTISTRAND) CABLES - HEAT RESISTANT FLAME RETARDANT LOW SMOKE LOW HALOGEN - LEAD FREE CONFORMING TO IS-694:2010 WITH BRIGHT ANNEALED ELECTROLYTIC BARE COPPER CONDUCTOR OF VOLTAGE GRADE 1100 VOLTS

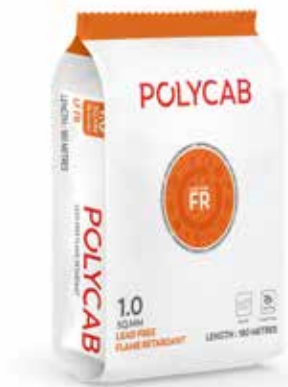


FLAME
RETARDANT


LEAD FREE
PVC INSULATION


RODENT
PROTECTION

REACH
COMPLIANT

RoHS
COMPLIANT

99.97% HIGH
PURITY COPPER

POLYCAB LF FR PRICELIST

SIZE (SQ.MM.)	180 METER POUCH PACKAGING	
	LP (₹)	COILS PER CARTON
1	3660	12
1.5	5350	10
2.5	8470	6
4	12380	4
6	18490	3

POLYCAB PVC INSULATED SINGLE CORE UNSHEATHED INDUSTRIAL (MULTISTRAND) CABLES - LEAD FREE FLAME RETARDANT (LF FR) CONFORMING TO IS-694:2010 WITH BRIGHT ANNEALED ELECTROLYTIC BARE COPPER CONDUCTOR OF VOLTAGE GRADE 1100 VOLTS

SUBMERSIBLE CABLES

ENGINEERED FOR EVERY ENVIRONMENT



Product Features



Tough & Flexible cables



Excellent moisture resistance



Highest quality electrolytic grade copper



High abrasion resistance



POLYCAB 3C FLAT SUBMERSIBLE CABLES

Polycab PVC / XLPE Insulated and PVC Sheathed Industrial 3 Core Flat Submersible Cable with Bare Bunched Copper Conductor for Submersible Pump Motors with Voltage Grade 1100 Volts as per IS:694/2010

SUBMERSIBLE/ 3CF CABLE			
	PVC INSULATED PRICE PER 100 MTR. (DRUM PACKING 500/1000 MTRS.)	XLPE INSULATED PRICE PER 100 MTR. (DRUM PACKING 500/1000 MTRS.)	PVC INSULATED PRICE PER 100 MTR. (CORROGATED BOX PACKING)
1.5 SQ MM	9,555	10,055	9,385
2.5 SQ MM	14,825	15,650	14,575
4 SQ MM	21,855	23,000	21,460
6 SQ MM	32,230	33,855	31,630
10 SQ MM	56,100	58,920	
16 SQ MM	86,760	91,190	
25 SQ MM	1,35,900	1,42,470	
35 SQ MM	1,87,900	1,97,215	

TELEPHONE WIRE

DIAL FOR CLEARER CONVERSATIONS



Product Features



HDPE

Special grade
high density
polyethylene
insulation



Flame retardant
compound jacket



Clear voice quality
and can be used in
dry and damp area

POLYCARB INDUSTRIAL TELEPHONE (SWITCHBOARD) CABLES

Polycab High Conductivity Solid Annealed Bare Copper industrial Telephone (Switchboard) Cables with High Density Polyethylene Insulation, Paired and Sheathed with High Oxygen Index, Fire Retardant, PVC Compound, Grey Outer Sheath generally conforming ITD Specification



TELEPHONE (SWITCHBOARD) CABLE


	0.4 MM- 90 MTR	0.5 MM- 90 MTR	0.4 MM-100 MTR	0.5 MM-100 MTR
1 PAIR	680	955	760	1,065
2 PAIR	1,205	1,705	1,335	1,890
3 PAIR	1,770	2,520	1,965	2,800
4 PAIR	2,270	3,330	2,515	3,695
5 PAIR	2,790	4,130	3,085	4,585
10 PAIR		8,030		8,915
20 PAIR		15,500		17,260
50 PAIR				44,750
100 PAIR				87,600

COAXIAL CABLES

TRUE TO LIFE PICTURE & SOUND QUALITY




Product Features



Minimum loss due to low attenuation in signal strength for better reception



Higher bandwidth: larger network coverage




Less electromagnetic interference due to high shielding efficiency



Minimal Structural Return Loss



Moisture Proof



Physical foam insulation

POLYCAB INDUSTRIAL JELLY FLOODED CO-AXIAL CABLES

Polycab Gas Injected Physical Polyethylene Foam Insulation with Laminated Aluminium Tape and Aluminium Wire Braid, Jelly Flooded PVC Black Jacketed Industrial Coaxial Cables.

COAXIAL CABLE			
	100M UNARMoured	305M UNARMoured	1000M FLEXIBLE ARMoured
RG 59	2,290	7,000	
RG 6	2,880	8,820	95,000
RG 11	6,560	20,100	1,48,200
RG 6 CCS	1,865	5,680	
RG 11 CCS	3,755	11,450	




CCTV CABLES

GUARDING EVERY VIEW, SUPERIOR QUALITY



Product Features



Minimal signal distortion or attenuation



Designed for complete video frequency range



Ideal for both indoor & outdoor applications



No reflection & best picture quality



Alloy braiding for superior performance

POLYCAB CCTV CABLES

Coaxial cables consisting of solid annealed bare copper conductor of electrolytic grade which is insulated with physical foam PE dielectric, aluminium foil taped, jelly flooded, braided with alloy and then jacketed with UV resistant PVC.

CCTV CABLE			
	90 MTR	180 MTR	1000 MTR
CCTV 3+1	3,765	7,530	
CCTV 4+1	4,095	8,190	
CCTV 4+1 (ARMOURED)			1,29,200



LAN CABLES

EMPOWERING DATA FLOW



Product Features



Supports Gigabit Ethernet Standard



Higher bandwidth and low signal loss



Effective transmission of high speed data




High quality video and voice streaming

POLYCAB LAN (NETWORKING) CABLES

Conductor is made of electrolytic plain annealed solid copper of size 23 AWG, high quality polyethylene insulated with suitable colour code, twisted pair. Unshielded light grey PVC jacketed with improved fire characteristic meeting requirements of TIA/EIA/568-C.2

LAN CABLE

	UOM	LP
CAT 5E UTP FR -PVC	305 MTR	11,950
CAT 6 UTP PVC-FR (WITHOUT SEPARATOR)	305 MTR	12,550
CAT 6 UTP PVC-FR (WITH SEPARATOR)	305 MTR	12,900
CAT 6 FTP FR PVC	305 MTR	19,840
CAT 6A UTP PVC-FR	305 MTR	15,280
CAT 6A FTP PVC-FR	305 MTR	23,470
CAT 6 SFTP PVC-FR	305 MTR	29,640
CAT6 UTP-ARMOURED / FLEXIBLE ARMOURED	1000 MTR	1,10,660
CAT6 FTP-ARMOURED / FLEXIBLE ARMOURED	1000 MTR	1,21,000
CAT6A UTP-ARMOURED / FLEXIBLE ARMOURED	1000 MTR	1,25,530
CAT6A FTP-ARMOURED / FLEXIBLE ARMOURED	1000 MTR	1,37,100
CAT 6 ECCS ARMOURED	305 MTR	28,000
CAT6A - ECCS ARMOURED	305 MTR	30,780
CAT6A SFTP - ECCS ARMOURED	305 MTR	39,400

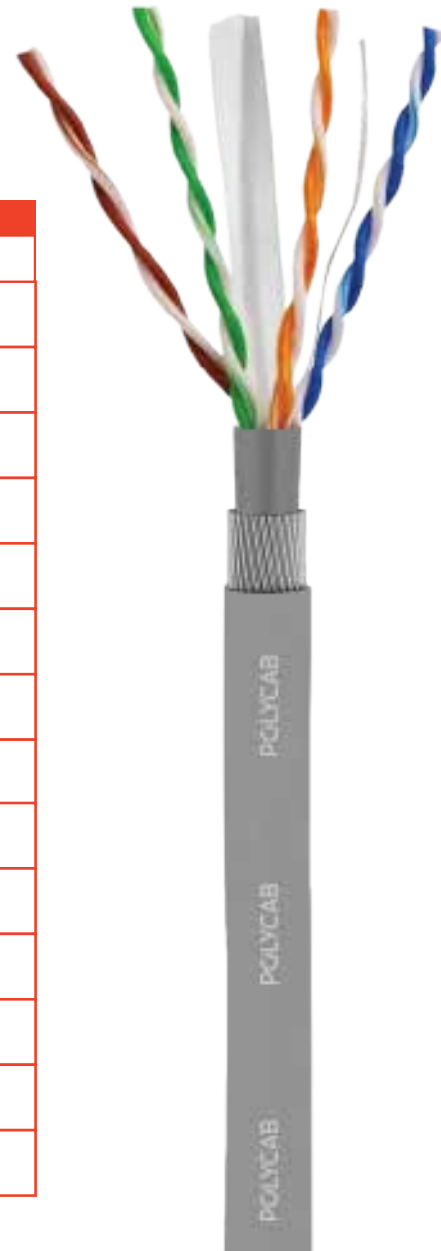

SPEAKER WIRE

CRYSTAL CLEAR SOUND



Product Features



Virgin grade
PVC resin




Low power loss
while using in HiFi
surround sound

POLYCAB INDUSTRIAL SPEAKER WIRES

Speaker Wires (Oxygen Free Copper Conductor) (Rate in Rs. per 90 mtr)

SPEAKER	
SIZE	90 MTR
0.5 SQ MM	1,930
0.75 SQ MM	2,800
1 SQ MM	3,460
1.5 SQ MM	5,140
2 SQ MM	7,965
2.5 SQ MM	8,535
23/36	1,905
40/36	2,915
70/36	3,950
23/38	1,290
40/38	2,140
70/38	2,900

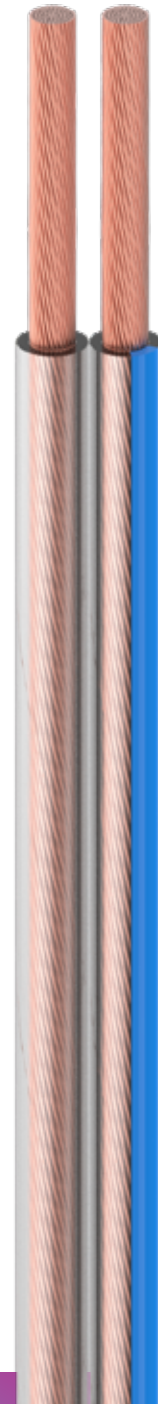

POLYCAB EXPERTS

INSTANT SCAN INSTANT MONEY



Scan the
QR code to
download the
EXPERTS APP

For any query regarding **Polycab Experts program**
reach out to Polycab Sales team or 📞 **022 49581311**

TERMS AND CONDITIONS APPLY

- The above rates are exclusive of GST which shall be charged extra.
- This pricelist is subject to change without notice.
- As per international practice which is also adopted by the Bureau of Indian Standards, the diameter of the conductor shown herein is nominal; the size of the conductor is determined by its resistance. The construction of the conductor is as per market convention and should be treated as a guideline only. It may vary within the limits of IS 8130:1994 with its related classes & tables.

POLYCAB

IDEAS. CONNECTED.

Corporate Office:

POLYCAB INDIA LIMITED

#29, The Ruby, 21st Floor, Senapati Bapat Marg,

Tulsi Pipe Road, Dadar (West),

Mumbai - 400 028, Maharashtra (India)

Ph.: +91-22-2432 7070/4, 6735 1400

Email: enquiry@polycab.com, Toll Free No.: 1800 267 0008

Follow us on: [f](#) [X](#) [in](#) [@](#) [v](#)

Website: www.polycab.com